

A&B Eagle Line



Quality One, Two & Three Bottom Plows



2315 Highway 11 South, Sweetwater, TN 37874

Tel: (423) 337-2390 **Fax:** (423) 337-2338

Email: sales@ab-eagleline.com **Website:** www.ab-eagleline.com

Quality One, Two & Three Bottom Plows

A&B Eagle Line



COMPACT TRACTOR PLOW - 12"

- Available with 12" Bottom Only
- 1" x 4" Frame Members
- 1" x 3" Vertical Beams
- 1/2" x 2 1/2" A-Frame
- 3 Point Hitch with Replaceable Cat 1 Lift Arm Pins
- Replaceable Shin, Share and Moldboard
- Adjustable Width of Cut (Hillside)
- Shear Bolt Protection
- Grade 5 Heat Treated and Plated Fasteners
- Comes Assembled, Installed A-Frame and Ready to Use
- 15-25 HP Recommended
- Optional: Gauge Wheel with Ball Bearings

Model Number: 1BP12CT
Weight: 217lbs

A&B Eagle Line




ONE BOTTOM PLOW - 12", 14", 16"

- Available with 12", 14" or 16" Bottom
- 1" x 4" Frame Members
- 1" x 3" Vertical Beams
- 1/2" x 2 1/2" A-Frame
- 3 Point Hitch with Replaceable Cat 1 Lift Arm Pins
- Replaceable Shin, Share and Moldboard
- Adjustable Width of Cut (Hillside)
- Shear Bolt Protection
- Grade 5 Heat Treated and Plated Fasteners
- Comes Assembled, Installed A-Frame and Ready to Use
- 15-30 HP Recommended
- Optional: Coulter and Gauge Wheel with Ball Bearings

Model Number: 1BP12, 1BP14, 1BP16
Weight: 256lbs, 256lbs, 262lbs

Quality One, Two & Three Bottom Plows

A&B Eagle Line

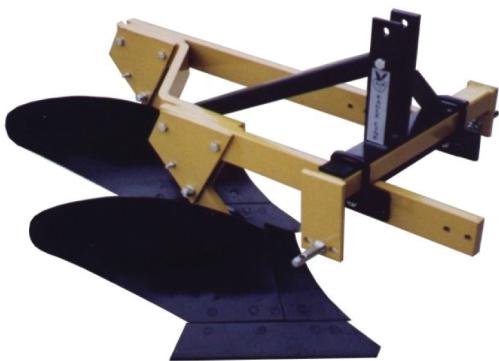

TWO BOTTOM PLOW - 12", 14", 16"

- Available with 12", 14" or 16" Bottom
- 1" x 4" Frame Members
- 1" x 3" Vertical Beams
- 1/2" x 2 1/2" A-Frame
- 3 Point Hitch with Replaceable Cat 1 Lift Arm Pins
- Replaceable Shin, Share and Moldboard
- Adjustable Width of Cut (Hillside)
- Shear Bolt Protection
- Grade 5 Heat Treated and Plated Fasteners
- Comes Assembled, Installed A-Frame and Ready to Use
- 20-40 HP Recommended
- Optional: Coulter and Gauge Wheel with Ball Bearings

Model Number: 2BP12, 2BP14, 2BP16
Weight: 411lbs, 411lbs, 423lbs

A&B Eagle Line



THREE BOTTOM PLOW - 14", 16"

- Available with 14" or 16" Bottom
- 1" x 4" Frame Members
- 1" x 3" Vertical Beams
- 1/2" x 2 1/2" A-Frame
- 3 Point Hitch with Replaceable Cat 1 Lift Arm Pins
- Replaceable Shin, Share and Moldboard
- Adjustable Width of Cut (Hillside)
- Shear Bolt Protection
- Grade 5 Heat Treated and Plated Fasteners
- Comes Assembled, Installed A-Frame and Ready to Use
- 35-50 HP Recommended
- Optional: Coulter and Gauge Wheel with Ball Bearings

Model Number: 3BP14, 3BP16
Weight: 695lbs, 713lbs